



Search

Home Business Research Applications Reference Products Events Advertising About

Optics Automation Electronics Lasers MEMS/Nanotech LEDs Imaging and Machine Vision Displays Cameras

Ultra Durable Thin Film Coatings

DSI Deposition Sciences
INTEGRATED SERVICES
Bringing Technology to Light

[click for more info](#)



LIGHT CONVERSATION
MONTHLY NEWSLETTER

Research

Home » Research » News

News

Features

Light Research

A Flexible, Flat, Transparent Imaging Device

Published on 20 February 2013



Digital cameras, medical scanners and other imaging technologies have advanced considerably during the past decade. Continuing this pace of innovation, an Austrian research team has developed a way of capturing images based on a flat, flexible, transparent and potentially disposable polymer sheet. The team describes their new device and its possible applications in a paper, entitled "Towards a transparent, flexible, scalable and disposable image sensor using thin-film luminescent concentrators" and co-authored by Alexander Koppelhuber and Oliver Bimber, published today in the *Optical Society's* (OSA) open-access journal *Optics Express*.

The new imager, which resembles a flexible plastic film, uses fluorescent particles to capture incoming light and channel a portion of it to an array of sensors framing the sheet. With no electronics or internal components, the imager's elegant design makes it suitable for a new breed of imaging technologies, including user interface devices that can respond to a simple gesture.

According to Bimber of the [Johannes Kepler University at Linz](#) in Austria: "To our knowledge, we are the first to present an image sensor that is fully transparent [with] no integrated microstructures, such as circuits, and is flexible and scalable at the same time."

The sensor is based on a polymer film known as a luminescent concentrator (LC), which is suffused with tiny fluorescent particles that absorb a specific wavelength (e.g., blue light) and then re-emit it at a longer wavelength (e.g., green light). Some of the re-emitted fluorescent light scatters out of the imager, but a portion of it travels throughout the interior of the film to the outer edges, where arrays of optical sensors (similar to one-dimensional, or 1D, pinhole cameras) capture the light. A computer then combines the signals to create a gray-scale image. "With fluorescence, a portion of the light that is re-emitted actually stays inside the film," says Bimber. "This is the basic principle of our sensor."

For the luminescent concentrator to work as an imager, Bimber and his colleagues had to determine precisely where light was falling across the entire surface of the film. This was the major technical challenge because the polymer sheet cannot be divided into individual pixels like the charge-coupled device (CCD) camera inside a smart phone can. Instead, fluorescent light from all points across its surface travels to all the edge sensors. Calculating where each bit of light entered the imager would be like determining where along a subway line a particular passenger got on after the train reached its final destination and all the passengers exited at once.

The solution came from the phenomenon of light attenuation, or dimming, as it travels through the polymer. The longer it travels, the dimmer it becomes. So by measuring the relative brightness of light reaching the sensor array, it was possible to calculate where the light entered the film. This same principle has been employed in an input device that tracks the location of a single laser point on a screen.

The researchers were able to scale up this basic principle by measuring how much light arrives from every direction at each position on the image sensor at the film's edge. They could then reconstruct the image by using a technique similar to X-ray computed tomography, more commonly known as a "CT scan." According to Bimber, "Our system works in the same way, but where CT uses X-rays, our technique uses visible light."

Currently, the resolution from this image sensor is low (32x32 pixels with the first prototypes). The main reason for this is the limited signal-to-noise ratio of the low-cost photodiodes being used. The researchers are planning better prototypes that cool the photodiodes to achieve a higher signal-to-noise ratio.

By applying advanced sampling techniques, the researchers can already enhance the resolution by reconstructing multiple images at different positions on the film. These positions differ by less than a single pixel (as determined by the final image, not the

Blog

- 21 FEB** Logistics Show LogiMat 2013: RFID and barcodes dominate
- 11 FEB** Pros and Cons of VISION's Two-Year Cycle
- 07 FEB** Photonics West 2013: Vision and commitment rewarded
- 06 FEB** Photonics West 2013: Light tools for real solutions
- 31 JAN** Countdown to Kickoff

[NEXT](#)

Light Research

- Marker-Free Nanoscopy Shows Pure Tomographic 3D Reconstructions of Living
- Holographic Foil Improves CPV Efficiency
- Scientists Confirm Proton Size Puzzle
- Evolution Influenced Light Design for Organic Solar Cells
- Self-Assembling Liquid Nanolenses Visualise <100 nm Nanoparticles

[NEXT](#)

Photon etc
A spectrum of solutions

Want to speed things up?

Use our Global Raman Imaging System

Forgot all the optics you learned in college?

Illumination Station

- Light Solution: Sustainable lighting in cold-storage facility
- Light Solution: 3D inspection in the automotive industry
- Case Study: Microscopy yields new views of cancer
- Light Solution: Machine vision in agriculture

polymer itself). By having multiple of these slightly different images reconstructed, it's possible to create a higher resolution image. "This does not require better photodiodes," notes Bimber, "and does not make the sensor significantly slower. The more images we combine, the higher the final resolution is, up to a certain limit."

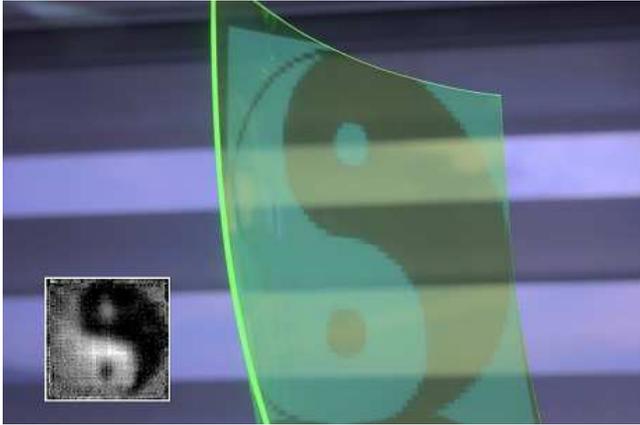


Image 2: A comparison between the (ground truth) image being focused on the sensor surface and the reconstructed image (inset). Photo courtesy Oliver Bimber, Johannes Kepler University Linz.

The main application the researchers envision for this new technology is in touch-free, transparent user interfaces that could seamlessly overlay a television or other display technology. This would give computer operators or video-game players full gesture control without the need for cameras or other external motion-tracking devices. The polymer sheet could also be wrapped around objects to provide them with sensor capabilities. Since the material is transparent, it's also possible to use multiple layers that each fluoresce at different wavelengths to capture colour images.

The researchers also are considering attaching their new sensor in front of a regular, high-resolution CCD sensor. This would allow recording of two images at the same time at two different exposures. "Combining both would give us a high-resolution image with less overexposed or underexposed regions if scenes with a high dynamic range or contrast are captured," Bimber speculates. He also notes that the polymer sheet portion of the device is relatively inexpensive and therefore disposable. "I think there are many applications for this sensor that we are not yet aware of," he concludes.

Image 1: The flexible and completely transparent image sensor. The plastic film is coated with fluorescent particles. (Credit: Optics Express)

Related Stories

- [Xenon Flash for Mobile Phones](#)
- [Seeing Through Smoke and Flames](#)
- [Bioengineered Ears that Look and Act Real](#)
- [Osram Manages German IR Laser Project](#)

[Back to News](#)

Like

Add New Comment

[Login](#)



Type your comment here.

Showing 0 comments

Sort by popular now

[Subscribe by email](#) [RSS](#)

Illuminating Products



Laser Components' Variable Gain Photodiode Amplifier


Laser Components



LED China 2013: GlacialLight to show latest products

GlacialLight, a division of the Taiwanese

NEXT

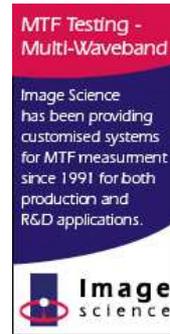

announces the variable
gain trans-impedance...
[Read More](#)

technology
manufacturer,... [Read
More](#)

1 2 3 4 5 6

Light Beams (Most Read)



OFC/NFOEC 2013: Optical communications pioneer Tingye Li to be honoured



Embedded World 2013: Smart agriculture



Photonics May Help Secure Electrical Grid



Laser World of Photonics 2013: Using biophotonics to destroy cancer cells



Prysm Wins Digi Award for Laser Phosphor Display

[NEXT](#)

Latest from the trade show floor



Laser World of Photonics 2013: Using biophotonics to destroy cancer cells



OFC/NFOEC 2013: Optical communications pioneer Tingye Li to be honoured



Pittcon 2013: Anasys improves AFM-IR nanoscale spectroscopy



Laser Damage 2013: Call for papers



LED China 2013: GlacialLight to show latest products

[NEXT](#)

[TOP](#)



TECHNOLOGIES TODAY

Business

News
Features
People

Research

News
Features
Light Research

Applications

News
Features
Illumination Station

Reference

Links
Glossary
Novus Buyers Guide
Classes & Workshops

Products

Events
Trade Shows &
Conferences
Classes & Workshops

Advertising

About
Our Team
Editorial Calendar
Write for us

Technologies

Optics
Automation
Electronics
Lasers
MEMS/Nanotech
LEDs
Imaging and Machine
Vision
Displays
Cameras

