




- Home
- Business
- Research
- Applications
- Reference
- Products
- Events
- Advertising
- About
- Optics
- Automation
- Electronics
- Lasers
- MEMs/Nanotech
- LEDs
- Imaging and Machine Vision
- Displays
- Cameras



Search

LIGHT CONVERSATION
MONTHLY NEWSLETTER

Click here to sign up
for our monthly newsletter

Email:

Polygon400

- Any pattern/shape
- Any wavelength
- Any where
- Any time

DLP inside

Simply Brighter

Patterned Illuminator for Optogenetics

Light Research



FLIR

FLIR SC35
FLIR SC15
FLIR SC5
packs

Compact thermal imaging camera packs for Research & Development and Science

More information



Digital cameras, medical scanners and other imaging technologies have advanced considerably during the past decade. Continuing this pace of innovation, an Austrian research team has developed a way of capturing images based on a flat, flexible, transparent and potentially disposable polymer sheet. The team describes their new device and its possible applications in a paper, entitled "[Towards a transparent, flexible, scalable and disposable image sensor using thin-film luminescent concentrators](#)" and co-authored by Alexander Koppelhuber and Oliver Bimber, published today in the *Optical Society's (OSA) open-access journal Optics Express*.

The new imager, which resembles a flexible plastic film, uses fluorescent particles to capture incoming light and channel a portion of it to an array of sensors framing the sheet. With no electronics or internal components, the imager's elegant design makes it suitable for a new breed of imaging technologies, including user interface devices that can respond to a simple gesture.

According to Bimber of the [Johannes Kepler University at Linz](#) in Austria: "To our knowledge, we are the first to present an image sensor that is fully transparent [with] no integrated microstructures, such as circuits, and is flexible and scalable at the same time."

The sensor is based on a polymer film known as a luminescent concentrator (LC), which is suffused with tiny fluorescent particles that absorb a specific wavelength (e.g., blue light) and then re-emit it at a longer wavelength (e.g., green light). Some of the re-emitted fluorescent light scatters out of the imager, but a portion of it travels throughout the interior of the film to the outer edges, where arrays of optical sensors (similar to one-dimensional, or 1D, pinhole cameras) capture the light. A computer then combines the signals to create a gray-scale image. "With fluorescence, a portion of the light that is re-emitted actually stays inside the film," says Bimber. "This is the basic principle of our sensor."

For the luminescent concentrator to work as an imager, Bimber and his colleagues had to determine precisely where light was falling across the entire surface of the film. This was the major technical challenge because the polymer sheet cannot be divided into individual pixels like the charge-coupled device (CCD) camera inside a smart phone can. Instead, fluorescent light from all points across its surface travels to all the edge sensors. Calculating where each bit of light entered the imager would be like determining where along a subway line a particular passenger got on after the train reached its final destination and all the passengers exited at once.



Light Research

Quantum Dots Could Deliver Vitamin D to Breast Cancer Tumours
First Photonic Nanocavity Probe Fits in Single Living Cell
Marker-Free Nanoscopy Shows Pure Tomographic 3D Reconstructions of Living Cells
Holographic Foil Improves CPV Efficiency
Scientists Confirm Proton Size Puzzle

The solution came from the phenomenon of light attenuation, or dimming, as it travels through the polymer. The longer it travels, the dimmer it becomes. So by measuring the relative brightness of light reaching the sensor array, it was possible to calculate where the light entered the film. This same principle has been employed in an input device that tracks the location of a single laser point on a screen.

The researchers were able to scale up this basic principle by measuring how much light arrives from every direction at each position on the image sensor at the film's edge. They could then reconstruct the image by using a technique similar to X-ray computed tomography, more commonly known as a "CT scan." According to Bimber, "Our system works in the same way, but where CT uses X-rays, our technique uses visible light."

Currently, the resolution from this image sensor is low (32x32 pixels with the first prototypes). The main reason for this is the limited signal-to-noise ratio of the low-cost photodiodes being used. The researchers are planning better prototypes that cool the photodiodes to achieve a higher signal-to-noise ratio.

By applying advanced sampling techniques, the researchers can already enhance the resolution by reconstructing multiple images at different positions on the film. These positions differ by less than a single pixel (as determined by the final image, not the polymer itself). By having multiple of these slightly different images reconstructed, it's possible to create a higher resolution image. "This does not require better photodiodes," notes Bimber, "and does not make the sensor significantly slower. The more images we combine, the higher the final resolution is, up to a certain limit."

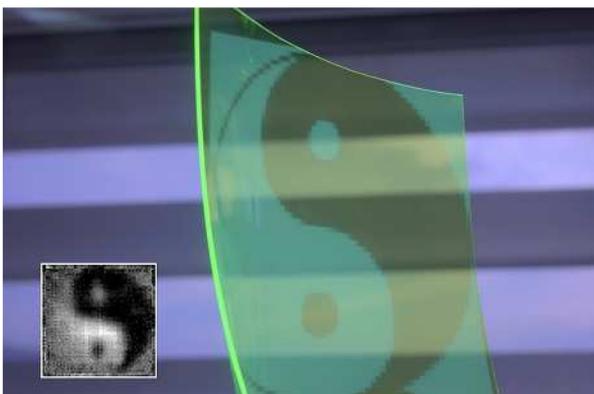


Image 2: A comparison between the (ground truth) image being focused on the sensor surface and the reconstructed image (inset). Photo courtesy Oliver Bimber, Johannes Kepler University Linz.

The main application the researchers envision for this new technology is in touch-free, transparent user interfaces that could seamlessly overlay a television or other display technology. This would give computer operators or video-game players full gesture control without the need for cameras or other external motion-tracking devices. The polymer sheet could also be wrapped around objects to provide them with sensor capabilities. Since the material is transparent, it's also possible to use multiple layers that each fluoresce at different wavelengths to capture colour images.

The researchers also are considering attaching their new sensor in front of a regular, high-resolution CCD sensor. This would allow recording of two images at the same time at two different exposures. "Combining both would give us a high-resolution image with less overexposed or underexposed regions if scenes with a high dynamic range or contrast are captured," Bimber speculates. He also notes that the polymer sheet portion of the device is relatively inexpensive and therefore disposable. "I think there are many applications for this sensor that we are not yet aware of," he concludes.

Image 1: The flexible and completely transparent image sensor. The plastic film is coated with fluorescent particles. (Credit: Optics Express)

Related Stories

- The MINERVA Project
- Aston Photonics Team Joins EC Fibre-Optic Project
- Chemical Composition with Nanoscale Resolution
- Studying Individual Nanotubes and Fibrils
- Silicon Photonics Platform Founded

[Back to News](#)

Like

Add New Comment

Login

 Type your comment here.

Sort by popular now

- TOP
- 
- 
- 
- 
- 
- Business
- News
- Features
- People
- Research
- News
- Features
- Light Research
- Applications
- News
- Features
- Illumination Station
- Reference
- Links
- Glossary
- Novus Buyers Guide
- Classes & Workshops
- Products
- Events
- Trade Shows & Conferences
- Classes & Workshops
- Advertising
- About
- Our Team
- Editorial Calendar
- Write for us
- Technologies
- Optics
- Automation
- Electronics
- Lasers
- MEMs/Nanotech
- LEDs
- Imaging and Machine Vision
- Displays
- Cameras

Copyright © 2013 Novus Media Today Group, LLC. All rights reserved. Website design and build by MM Design.

FLIR application story book
Download now and Pre-order your free application story book hardcopy today!

Illumination Station

- Light Solution: Sustainable lighting in cold storage facility
 - Light Solution: 3D inspection in the automotive industry
 - Case Study: Microscopy yields new views of cancer
 - Light Solution: Machine vision in agriculture
 - Light Solution: OCT helps diagnose skin disease
- NEXT

New Optical Coatings
Low Temperature Shift IR Bandpass Filters
Multispectral Optical Filter Assemblies
Very Long Wavelength Infrared (VLWIR) Filters
click here
DSI
Deposition Sciences INCORPORATED

Make your first prototype...

MTF Testing - Multi-Waveband
Image Science has been providing customised systems for MTF measurement since 1991 for both production and R&D applications.
Image science



TECHNOLOGIES TODAY



NIT Unveils Wide Dynamic Range Imaging Camera

New Imaging Technologies (NIT) introduces the wide dynamic range... [Read More](#)

1 2 3 4 5 6



NOVUS BUYER'S GUIDE
The Who's Who of GREEN Technology Companies

[Click now to add your free listing!](#)

Light Beams (Most Read)

- Aston Photonics Team Joins EC Fibre-Optic Project
 - Embedded World 2013: Smart agriculture
 - Laser World of Photonics 2013: Using biophotonics to destroy cancer cells
 - Prism Wins Digi Award for Laser Photonics Display
 - Quantum Dots Could Deliver Vitamin D to Break Cancer Tumours
- NEXT

Latest from the trade show floor

- OFC 2013: Skorpion demos CMOS tunable laser
 - OFC/NFOEC 2013: Featuring breakthrough research and technology-focused programming
 - OFC 2013: Phoenix Photonics to unveil space division multiplexing components
 - ISS Europe 2013: A Single European Semiconductor Strategy Is on Its Way
 - Laser World of Photonics 2013: Using biophotonics to destroy cancer cells
- NEXT